


Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO:** Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

FEE TRANSMITTAL for FY 2000 <small>Patent fees are subject to annual revision. Small Entity payments <u>must</u> be supported by a small entity statement, otherwise large entity fees must be paid. See Forms PTO/SB/09-12. See 37 C.F.R. §§ 1.27 and 1.28.</small>		Complete if Known	
		Application Number	
		Filing Date	October 25, 2000
		First Named Inventor	Dave DeWaard
		Examiner Name	
		Group / Art Unit	
TOTAL AMOUNT OF PAYMENT	\$ 355.00	Attorney Docket No.	P313347

METHOD OF PAYMENT 1. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to credit any overpayment to the account stated below Deposit Account Number: 08-3260 Deposit Account Name: <input checked="" type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR §§ 1.16 and 1.17 2. <input checked="" type="checkbox"/> Payment Enclosed: <input checked="" type="checkbox"/> Check <input type="checkbox"/> Money Order <input type="checkbox"/> Other	FEE CALCULATION (continued) 3. ADDITIONAL FEES <table border="1"><thead><tr><th>Large Entity</th><th>Small Entity</th><th>Fee Code (\$)</th><th>Fee Code (\$)</th><th>Fee Description</th><th>Fee Paid</th></tr></thead><tbody><tr><td></td><td></td><td>105 130 205 65</td><td></td><td>Surcharge - late filing fee or oath</td><td></td></tr><tr><td></td><td></td><td>127 50 227 25</td><td></td><td>Surcharge - late provisional filing fee or cover sheet.</td><td></td></tr><tr><td></td><td></td><td>139 130 139 130</td><td></td><td>Non-English specification</td><td></td></tr><tr><td></td><td></td><td>147 2,520 147 2,520</td><td></td><td>For filing a request for reexamination</td><td></td></tr><tr><td></td><td></td><td>112 920* 112 920*</td><td></td><td>Requesting publication of SIR prior to Examiner action</td><td></td></tr><tr><td></td><td></td><td>113 1,840* 113 1,840*</td><td></td><td>Requesting publication of SIR after Examiner action</td><td></td></tr><tr><td></td><td></td><td>115 110 215 55</td><td></td><td>Extension for reply within first month</td><td></td></tr><tr><td></td><td></td><td>116 380 216 190</td><td></td><td>Extension for reply within second month</td><td></td></tr><tr><td></td><td></td><td>117 870 217 435</td><td></td><td>Extension for reply within third month</td><td></td></tr><tr><td></td><td></td><td>118 1,360 218 680</td><td></td><td>Extension for reply within fourth month</td><td></td></tr><tr><td></td><td></td><td>128 1,850 228 925</td><td></td><td>Extension for reply within fifth month</td><td></td></tr><tr><td></td><td></td><td>119 300 219 150</td><td></td><td>Notice of Appeal</td><td></td></tr><tr><td></td><td></td><td>120 300 220 150</td><td></td><td>Filing a brief in support of an appeal</td><td></td></tr><tr><td></td><td></td><td>121 260 221 130</td><td></td><td>Request for oral hearing</td><td></td></tr><tr><td></td><td></td><td>138 1,510 138 1,510</td><td></td><td>Petition to institute a public use proceeding</td><td></td></tr><tr><td></td><td></td><td>140 110 240 55</td><td></td><td>Petition to revive - unavoidable</td><td></td></tr><tr><td></td><td></td><td>141 1,210 241 605</td><td></td><td>Petition to revive - unintentional</td><td></td></tr><tr><td></td><td></td><td>142 1,210 242 605</td><td></td><td>Utility issue fee (or reissue)</td><td></td></tr><tr><td></td><td></td><td>143 430 243 215</td><td></td><td>Design issue fee</td><td></td></tr><tr><td></td><td></td><td>144 580 244 290</td><td></td><td>Plant issue fee</td><td></td></tr><tr><td></td><td></td><td>122 130 122 130</td><td></td><td>Petitions to the Commissioner</td><td></td></tr><tr><td></td><td></td><td>123 50 123 50</td><td></td><td>Petitions related to provisional applications</td><td></td></tr><tr><td></td><td></td><td>126 240 126 240</td><td></td><td>Submission of Information Disclosure Stmt</td><td></td></tr><tr><td></td><td></td><td>581 40 581 40</td><td></td><td>Recording each patent assignment per property (times number of properties)</td><td></td></tr><tr><td></td><td></td><td>146 760 246 380</td><td></td><td>Filing a submission after final rejection (37 CFR § 1.129(a))</td><td></td></tr><tr><td></td><td></td><td>149 760 249 380</td><td></td><td>For each additional invention to be examined (37 CFR § 1.129(b))</td><td></td></tr><tr><td></td><td></td><td colspan="3">Other fee (specify) _____</td><td></td></tr><tr><td></td><td></td><td colspan="3">Other fee (specify) _____</td><td></td></tr><tr><td colspan="2">SUBTOTAL (1) \$ 355.00</td><td colspan="3">SUBTOTAL (3) (\$ 0.00)</td></tr></tbody></table>	Large Entity	Small Entity	Fee Code (\$)	Fee Code (\$)	Fee Description	Fee Paid			105 130 205 65		Surcharge - late filing fee or oath				127 50 227 25		Surcharge - late provisional filing fee or cover sheet.				139 130 139 130		Non-English specification				147 2,520 147 2,520		For filing a request for reexamination				112 920* 112 920*		Requesting publication of SIR prior to Examiner action				113 1,840* 113 1,840*		Requesting publication of SIR after Examiner action				115 110 215 55		Extension for reply within first month				116 380 216 190		Extension for reply within second month				117 870 217 435		Extension for reply within third month				118 1,360 218 680		Extension for reply within fourth month				128 1,850 228 925		Extension for reply within fifth month				119 300 219 150		Notice of Appeal				120 300 220 150		Filing a brief in support of an appeal				121 260 221 130		Request for oral hearing				138 1,510 138 1,510		Petition to institute a public use proceeding				140 110 240 55		Petition to revive - unavoidable				141 1,210 241 605		Petition to revive - unintentional				142 1,210 242 605		Utility issue fee (or reissue)				143 430 243 215		Design issue fee				144 580 244 290		Plant issue fee				122 130 122 130		Petitions to the Commissioner				123 50 123 50		Petitions related to provisional applications				126 240 126 240		Submission of Information Disclosure Stmt				581 40 581 40		Recording each patent assignment per property (times number of properties)				146 760 246 380		Filing a submission after final rejection (37 CFR § 1.129(a))				149 760 249 380		For each additional invention to be examined (37 CFR § 1.129(b))				Other fee (specify) _____						Other fee (specify) _____				SUBTOTAL (1) \$ 355.00		SUBTOTAL (3) (\$ 0.00)		
Large Entity	Small Entity	Fee Code (\$)	Fee Code (\$)	Fee Description	Fee Paid																																																																																																																																																																															
		105 130 205 65		Surcharge - late filing fee or oath																																																																																																																																																																																
		127 50 227 25		Surcharge - late provisional filing fee or cover sheet.																																																																																																																																																																																
		139 130 139 130		Non-English specification																																																																																																																																																																																
		147 2,520 147 2,520		For filing a request for reexamination																																																																																																																																																																																
		112 920* 112 920*		Requesting publication of SIR prior to Examiner action																																																																																																																																																																																
		113 1,840* 113 1,840*		Requesting publication of SIR after Examiner action																																																																																																																																																																																
		115 110 215 55		Extension for reply within first month																																																																																																																																																																																
		116 380 216 190		Extension for reply within second month																																																																																																																																																																																
		117 870 217 435		Extension for reply within third month																																																																																																																																																																																
		118 1,360 218 680		Extension for reply within fourth month																																																																																																																																																																																
		128 1,850 228 925		Extension for reply within fifth month																																																																																																																																																																																
		119 300 219 150		Notice of Appeal																																																																																																																																																																																
		120 300 220 150		Filing a brief in support of an appeal																																																																																																																																																																																
		121 260 221 130		Request for oral hearing																																																																																																																																																																																
		138 1,510 138 1,510		Petition to institute a public use proceeding																																																																																																																																																																																
		140 110 240 55		Petition to revive - unavoidable																																																																																																																																																																																
		141 1,210 241 605		Petition to revive - unintentional																																																																																																																																																																																
		142 1,210 242 605		Utility issue fee (or reissue)																																																																																																																																																																																
		143 430 243 215		Design issue fee																																																																																																																																																																																
		144 580 244 290		Plant issue fee																																																																																																																																																																																
		122 130 122 130		Petitions to the Commissioner																																																																																																																																																																																
		123 50 123 50		Petitions related to provisional applications																																																																																																																																																																																
		126 240 126 240		Submission of Information Disclosure Stmt																																																																																																																																																																																
		581 40 581 40		Recording each patent assignment per property (times number of properties)																																																																																																																																																																																
		146 760 246 380		Filing a submission after final rejection (37 CFR § 1.129(a))																																																																																																																																																																																
		149 760 249 380		For each additional invention to be examined (37 CFR § 1.129(b))																																																																																																																																																																																
		Other fee (specify) _____																																																																																																																																																																																		
		Other fee (specify) _____																																																																																																																																																																																		
SUBTOTAL (1) \$ 355.00		SUBTOTAL (3) (\$ 0.00)																																																																																																																																																																																		

SUBMITTED BY		Complete (if applicable)	
Name (Print/Type)	Michael F. Hughes	Registration No. (Attorney/Agent)	41,084
Signature		Telephone	(360)647-1296
		Date	October 25, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

LAW OFFICES OF
HUGHES & SCHACHT, P.S.
A PROFESSIONAL SERVICE CORPORATION

ROBERT B. HUGHES
MICHAEL R. SCHACHT
MICHAEL F. HUGHES

2801 MERIDIAN STREET, SUITE 1
BELLINGHAM, WA 98225-2412
(360) 647-1296
1-888-647-1296
FAX: (360) 671-2489

PATENT, TRADEMARK
& COPYRIGHT LAW

Assistant Commissioner for Patents
U.S. Patent and Trademark Office
Washington, D.C. 20231

October 25, 2000
Docket No. P313347

jc922 U.S. PTO
09/698433
10/25/00

Sir:

Transmitted herewith for filing is a Patent application:

Applicant: Mr. Dave DeWaard
Title: METHOD AND APPARATUS FOR CLEANING THE UDDER OF A COW

Application is claiming priority benefit under 35 U.S.C. §119(e) of U.S. Serial
Number(s) and Filing Date(s):

<u>Serial Number</u>	<u>Filing Date</u>
60/170,153	12/10/99

1. Enclosed are:

- a) Specification, claims and abstract (24 pages total: 17 pages of specification, 6 pages of claims, 1 page of abstract);
- b) 1-page Utility Patent Application Transmittal;
- c) 1-page Fee Transmittal in duplicate form;
- d) 8 sheets of informal drawings;
- e) Unexecuted Combined Declaration and Power of Attorney;
- f) Unexecuted Verified Statement Claiming Small Entity Status (Independent Inventor);
- g) Certificate of Express Mailing requesting treatment under 37 CFR 1.10, Express Mail Filing Date of October 25, 2000, Label No. EL589683620US;
- h) A check in the amount of \$ 355.00 for Filing Fee; and
- i) A stamped return receipt postcard.

EXPRESS MAIL CERTIFICATE OF MAILING
37 C.F.R. §1.10

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the United States Postal Service, Express Mail Post Office to Addressee, in an envelope addressed to BOX PATENT APPLICATION, Assistant Commissioner for Patents, Washington, DC 20231, on the date shown below.

Express Mail No: EL589683620US

Signature: 

Print Name: Darlene Jones-Miller
DATE MAILED: October 25, 2000

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN

Docket Number (Optional)

P313347

Applicant, Patentee, or Identifier: Dave DeWaard

Application or Patent No.: _____

Filed or Issued: October 25, 2000

Title: METHOD AND APPARATUS FOR CLEANING THE UDDER OF A COW

I hereby state that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN DARITECH, INC.

ADDRESS OF SMALL BUSINESS CONCERN 8540 Benson

Lynden, WA 98264

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☐ the specification filed herewith with title as listed above.
☒ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING Dave DeWaard

TITLE OF PERSON IF OTHER THAN OWNER _____

ADDRESS OF PERSON SIGNING 8540 Benson; Lynden, WA 98264

SIGNATURE _____

DATE _____

Patent Application

METHOD AND APPARATUS FOR CLEANING THE UDDER OF A COW

5

Field of the Invention

The invention relates to a new and improved cow udder
cleaning or sanitizing apparatus and method to be used in a milking
parlor, and more particularly to an automated system that sprays
10 disinfectant onto a cow's udder.

Background:

In a typical milking operation a claw is connected to the cow's
udder to extract the milk by providing a low pressure to draw the milk
out from the udder. When a cow is finished being milked the cow's
15 udder must be cleaned with a disinfectant such as iodine to prevent
infection. Traditionally this process is accomplished by a person who
cleaned each udder by hand with a spraying device. This required
having an extra person on staff and oftentimes the udder was not
thoroughly cleaned.

20 The present invention comprises an automated cleaning system
that cleans a cow's udder with a disinfectant such as iodine before or
after she has been milked. The system is to be implemented in a
circular milking parlor that basically consists of a circular platform
about 40 - 100 ft. in diameter that concentrically rotates about its
25 center. The circular platform has 20 - 100 slots (i.e. stalls) around the
perimeter where cows stand while being milked. The cows are facing

radially inward toward the center and are separated by radially extending rails. There is a fixed railing that circumferentially surrounds the circular platform and the platform rotates 360 degrees in a six to twenty minutes while the cows are being milked. After about 180

5 degrees of rotation from the location where the cow has entered the slot, the milking of the cow has been completed and the milking gear is automatically removed from a cow's udder.

This apparatus of the present invention comprises a movable swivel arm that is activated by sensors that cause the arm to move to a
10 location in-between the cow's legs and spray the udder with disinfectant. The portion of the arm that extends radially inwardly between the cow's hind legs is made of a flexible, durable material. At the end of this arm portion is a nozzle for dispensing disinfectant. The cleaning apparatus remains at a fixed position at a location after from
15 the location where the cow enters. The apparatus is mounted on a fixed railing (or other stationary structure) that circumferentially extends around the rotating circular platform and the cleaning of the cow's udder is the last part of the milking procedure before a cow backs out of a stall after about 300-350 degrees of travel from where she entered
20 the stall.

Background Art:

The 5,678,506 Van der Burg et al. patent discloses the broad concept of automatically dispensing disinfectant to a cow after it has
25 been milked. More specifically as seen in Figures 1 and 2, milking robot 8 is movably connected to upper frame portion 4 so it can slide left or right in Figure 1. The position and orientation of the cow and exactly how the arm 46 gets under the cow is not completely

understood. Apparently the robot arm 46 is positioned in under the cow by cylinders 47 and 52 and teat cups 53 and 54 engage the teats (see Figure 2, plan view of the apparatus). The arms 44 and 45 are raised to engage the teats and lowered to disengage after milking.

5 The post milking cleaning system (as described in column 12 line 38+) as shown in Figures 16 and 17 comprises a spray nozzle 108 positioned at the end of robot arm 46. This spray nozzle 108 discharges a fan-shaped spray pattern forward in front of the teat cups.

The following patents also turned up in the applicant's search.

10 These are less relevant and are grouped by manual dispensing systems, timed stationary apparatuses and chemical germicides. The manual systems include:

5,711,251 Green et al, shows a germicide applicator for cow udder that utilizes a dispensing wand. Valves allow metering of both
15 lactic acid and sodium chlorite. As seen in Figure 1, supplies 12 and 14 each hold these liquids. Pump 16 delivers liquid through the check valves 54 and 24 and through the lines 32. The reservoir 28 contains a float switch 60. When the fluid level is low in reservoir 28 the float switch sends a signal to the OR gate 64 which emits a signal to
20 deactivate the pressure source 58. Return line 50 allows a return passage for fluid through manual valve 54.

2,731,300 Jansen, shows a cow washer that assists an operator to manually clean a cow's udder. Figures 5 and 6 shows a nozzle means 18 where ball 31 will cut off communication with either nozzle
25 22 or 23, whichever is beneath the other. As seen in Figure 2 the nozzle means 18 can be rotated 180 degrees to use nozzle 23 which may have a different spray width.

The timed stationary system patents include:

5,685,262 & 5,101,770 Stevenson, shows a post-milking and pre-milking udder care system. As seen in Figures 2 and 3 the applicator 20 comprises nozzles 23 to dispense liquid. The dispersion of liquid through applicator 20 is controlled by the control knob 10 (Figure 1).

3,554,166 Belden, shows an udder spraying device such as the ones used in the above cited Stevenson patents 5,685,262 and 5,101,770. As seen in Figure 3 the carriage plate 53 slides along the upper surface of a support plate 58 so the spraying unit may be positioned under the cow.

1,968,564 Luks, shows a milking parlor in which there are spray nozzles directed at the cow's upper region. The spray nozzles 17 and 49 are activated by valve 61 that can be changed by lever 62.

The chemical patents are as follows:

5,776,479 Pallows et al, discloses a germicidal teat dip to reduce or prevent mastitis.

4,466,959 Lauermann et al, is directed to a compound for the disinfecting of teats.

4,288,428 Foll et al, relates to an udder disinfecting preparation comprising an iodophor.

None of the disclosures disclose a cow udder cleaning apparatus that can be retrofitted to an existing milking parlor that consistently and accurately administers disinfectant to a cow's udder.

Summary of the Invention:

The present invention is a cow udder dipping apparatus which can clean or disinfect a cow's udder before or after she has been milked where the apparatus has a mounting structure which moves with respects the location of the cows to be cleaned. Located on this

mounting structure is a positioning system which comprises an extension arm and actuator. The extension arm has a path of travel which is adapted to extend underneath the udder of the cow which is in a cleaning location to a cleaning position. When the extension arm is in the cleaned position a dispersion portion on the extension arm sprays cleaning or disinfecting material onto the cow's udder. The actuator then withdraws the extension arm into a protracted position

Brief Description of the Figures

Fig. 1 shows a plan view of a prior art milking operation incorporating the present invention;

Fig. 2 is a side elevation view of a cow udder cleaning apparatus that is attached to the perimeter railing of a milking operation with the cleaning arm of the present invention in its retracted position;

Fig. 3 is a rear view of a cow udder cleaning apparatus, looking inwardly toward the center of the platform of the milking parlor;

Fig. 4 is a side elevational view of the cow udder cleaning apparatus where the swing arm member is positioned in between a cow's legs and is dispersing a disinfectant;

Fig. 5 is a side elevational view of a second embodiment of the apparatus of the present invention;

Fig. 6 is a side elevational view of a third embodiment of the apparatus of the present invention;

Fig. 7 is a fourth embodiment of the apparatus of the present invention where it is employed in a herringbone design rotary platform parlor;

Fig. 8 is a fifth embodiment where the apparatus of the present invention is employed in a circular milking parlor where the

swing arm rotates in the horizontal plane to the side portion of the cow;

Fig. 9 is a sixth embodiment where the apparatus of the present invention is employed in a circular milking parlor where the swing arm also rotates in a horizontal plane but the extension travels between the hind legs of the cow.

Detailed Description of the Present Invention:

First there will be a brief discussion of the overview of a cow milking operation and the various stages of its operation; next there will be a brief overview of the operation of the present invention; and finally there will be a detailed description of the embodiments of the present invention. The invention relates to teat dipping or referred otherwise referred to as cow udder cleaning or cow udder sanitizing.

As seen in Figure 1, there is conventional milking parlor 20 that comprises a rotating platform 22 on which the cows 24 are standing during milking, and a perimeter railing 26 surrounding the platform 22. The cow udder cleaning apparatus of the present invention is shown at 28. The platform 22 is about forty to one hundred feet in diameter and makes a complete rotation once about every six to twenty minutes. The plate 22 comprises a plurality of stalls 42 that each one comprises a milking claw and vertical bars 43.

The milking operation has six stages and there are six locations that correspond to six physical proximate locations of a cow at which certain operations are executed through the milking operation. There is the entry location 30, the claw attachment location 32, the milk extraction location 34, the claw removal location 36, the udder cleaning location 38 and finally the exit location 40. In general, the milking operation comprises the first steps where the cow steps onto the

platform 22 and into a stall 42 at the entry location 30. The milking operator quickly washes the udder of the cow 24 to remove dirt and then manually places the claw upon the cow's udder at the claw attachment location 32. From hereon no manual intervention is

5 required with the present invention 28 employed. The next phase is the milk extraction which occurs at the milking location 34, and after ninety degrees to one hundred and thirty degrees of rotation of the platform 22 the cows enter the claw removal section 36 where a spring loaded device will withdraw the claw to the side of the stall 42 clear of

10 the cow's feet. After the claw is removed the cow's udder is to be cleaned with iodine or other disinfectant by the cow udder cleaning device 28 of the present invention. The final step occurs at the cow location 40 where the cows back out of the stall. The platform 22 rotates continuously, but the rotation is relatively slow and the cows

15 can step off the rotating platform 22 without much difficulty.

For purposes of this application the term "clean" or "cleaning" shall be referred to as any sanitizing, spraying, or killing bacteria or remove debris on an udder surface. This includes spraying iodine or other chemical agents in liquid or powder form on to the udder.

20 The general operation of the cow udder cleaning device 28 is as follows. Each stall 42 is defined by two posts 44 at the perimeter of the platform 44 and radially aligned horizontal bars 45. When the platform 22 rotates, each vertical post 44 will come into contact with contact sensor 56 (to be described later) which indicates that a stall 42 is in

25 proper position for the udder cleaning device 28 to operate. Next optical sensor 58 (also described later) detects whether a cow is occupying stall 42, and if there is a cow present an arm 46 is repositioned in-between the cow's hind legs and disinfectant is discharged from nozzle 47. Then the swing arm 46 is retracted.

There will now be a detailed description of the cow udder cleaning device 28 followed by a more detailed description of the operations of the same.

The cow udder cleaning device 28 is shown in detail in Figures 2-4. The main components are a vertical mounting plate 48, a sensor system 50, a processor (or control system or solenoid processor) 52, and a positioning system 54.

The mounting plate 48 is rigidly attached to the perimeter railing 26 which is stationary. The mounting plate 48 functions as a base plate to which all the key components of the cow udder cleaning system 28 are mounted thereon.

In the preferred embodiment the sensor system 50 comprises two sensors, a contact sensor 56 and an optical sensor 58. Both of the sensors provide data input to the processor 52. The contact sensor 56 comprises a sensing contact member 59 which comprises a vertical stem portion 60 that extends upwardly from the upper part of the mounting plate 48, and has an upper end 62 and a base end 64 by which it is mounted for limited rotation about its vertical axis. A horizontal arm 66 is connected by its base end 70 to the upper end 62 of the vertical stem portion 60, and comprises a radially inward swing end 68, a base end 70 and a contact surface 72. The contact sensor 56 further comprises a sensor 74 connected to the base end 64 of the vertical stem 60. The sensor 74 is responsive to rotation of the vertical stem 60. When the contact surface 72 of the horizontal arm 66 is engaged by one of the posts 44, the arm rotates to rotate the vertical stem 60 to cause the sensor 74 will send a signal to indicate that one of the stalls 42 has arrived at its disinfecting location.

In the preferred form, the second sensor 58 is an optical sensor with a function to detect if a cow is located in a stall. The optical

sensor 58 emits electromagnetic radiation in the non-visible frequency range and the sensor 58 will detect rebounding electromagnetic waves. Of course, other distance measure sensors that detect if an object is present within a certain distance could be employed. The
5 sensor 58 will also send its data to processor 52 for data analysis.

Thus, when the contact sensor 56 and the optical sensor 58 provide the signals that the stall 42 is in the operating position and a cow is present, the processor 52 initiates the disinfecting process.

The operating or positioning system 54 has a primary function to
10 place the swing arm 46 in its disinfecting position as shown in Fig. 4 in between a cow's legs and to cause the iodine (or other cow udder cleaning fluid) to be discharged through the nozzle 47 in a vertical direction on cow's udder.

In the preferred form, the positioning system 54 comprises the
15 aforementioned swing arm 46, an actuator (actuating mechanism) 78, and a dispersion portion 80 comprising the nozzle 47. The swing arm 46 comprises a vertical arm portion 82, an upper portion 84, a middle portion 86 and a lower portion 88. The swing arm 46 further comprises a horizontal arm member 90 that is located in the lower portion 88 and
20 a vertical member 92. The upper portion 44 of the vertical arm portion 86 is pivotally connected at 100 to the upper part of the mounting plate 48, so as to be able to rotate radially inward and outwardly. The radially inward and outward motion is referred to the path of travel of the swing arm 47 shown as dashed line 53. The path of travel 53 of
25 the swing arm (or extension arm) 47 has an inward portion (or cleaning position or dispersion position) 55 that is substantially below the cow's udder and a withdrawn portion (or retracted position) 57 that is radially outward from the stall 42 and clear from any rotating member of the plate 22 such as the posts 43. The cleaning position or dispersion

position is any location along the path of travel of the extension arm from the retracted position to the cleaning position where the dispersion portion can adequately spray material onto the cow's udder. An extension 102 is fixedly connected in the middle portion 86 of the vertical member 82 and extends radially outward therefrom and comprises a base connecting portion 104 and an outer portion 106. A pivot means 108 is located at the outer portion 106 and is attached to the actuating member 78.

The horizontal member (extension arm) 90 which is located at the lower portion 88 of the vertical arm portion 88, comprises a base end 109, and inward end (fluid dispensing portion) 110, a lower portion 112 and an upper portion 114. The horizontal member 90 is preferably made from a flexible material to withstand the potential abuse from the cow's hooves. The horizontal member 90 should also be relatively thin in the tangential direction so that it can more easily slip in between the cow's hind legs.

The dispersion portion (cleaning fluid dispensing portion) 80 is located at the inward end 110 of the horizontal member 90, and (as indicated previously comprises the vertically mounted nozzle 47. The nozzle 47 is in communication with a disinfectant section which comprises a disinfectant source connected to the nozzle 47 by a hose or disinfectant line (indicated by the broken line 116) which holds disinfectant fluid (such as iodine) and is adapted to disburse this disinfectant fluid in a fanlike or expanding spray like manner as shown in Fig. 4.

The actuator (actuating system) 78 comprises a cylinder portion 118 and a piston rod 120. The actuator can be driven by a hydraulic fluid or gas. When the actuator is in the position as shown in Fig. 2 the internal cylinder is pressurized and the force exerted on the piston rod

120 moves the swing arm 46 radially outwardly to the position of Fig. 2. When the pressure is released within the actuator 78 the swing arm 46 will rotate about pivot location 100 radially inwardly to a position shown in Fig. 4. Alternatively actuator 78 could have an internal spring which
5 biases the piston rod 120 to the position shown in Fig. 2, and when pressure is applied to the cylinder within the actuator 78 the piston rod 120 will retract to within the cylinder portion 118 and hence move the swing arm 46 radially inwardly to the position shown in Fig. 4. In the preferred embodiment the former arrangement of the actuator 78 is
10 employed.

There will now be a more detailed discussion of the operation of the cow under cleaning apparatus 28. As mentioned earlier, the cow udder cleaning apparatus 28 is located in the udder cleaning location 38 of the milking parlor 20, and it is the final stage of the milking
15 operation. It should be noted that the milking operation is essentially a continuous one, meaning the rotating platform 22 constantly rotates and the cows 24 continuously enter onto and exit from the rotating platform 22. It should be noted that the apparatus could be used before the milking operation begins and the apparatus of the present
20 invention could be located at a variety of locations around the rotating platform 22.

We will now describe the cow udder cleaning apparatus when a single stall 42 is rotating to the cleaning location in front of the cow udder cleaning apparatus 28. As shown in Fig. 3, when this stall 42
25 moves clockwise, as seen in Fig. 2, the contact surface 72 of the contact sensor 56 comes in contact with the vertical post 43a (or other member in proximity to the stall 42. It should be noted, that in Fig. 3 the perimeter railing 26 and the mounting plate or structure (base platform) 48 attached thereon are stationary, and the rotating plate 22

and vertical bars 43 are rotating and hence moving to the left at a relatively slow speed of .2 to .9 mph.

Now to return to the discussion of the operation of the cow udder cleaning apparatus 28, when the contact member 59 is rotated
5 about the vertical stem portion 60 of the same, the sensor 74 passes this information to the processor 52. The next step is that the processor 52 will now take a reading from the optical sensor 58 to detect if a cow is present in the stall 42 at the cleaning location (operating location). As shown in Fig. 3, if there is not a cow in the
10 stall 42, the sensor 58 would detect the lack of a presence of a cow in the stall 42 and relay this back to the processor 52. Then the processor 52 will take no action for the positioning system (cleaning section) 54 and will be ready for the next signal sent from the contact sensor 60 which would indicate the next stall is in position. Of course
15 the cleaning or sanitizing operation could take place without the optical sensor 58; however, the spraying action would take place regardless if a cow is present in the stall or not.

Now we will discuss the operation of the cow udder cleaning operation where instead the stall 42 being empty, there is a cow
20 located therein as shown in Figs. 2 and 4. Now after the contact sensors 60 comes in contact with vertical post 43a and delivers a signal to processor 52, the processor 52 will then get a reading from optical sensor 58 which will indicate the presence of a cow in the stall 42 as shown in Fig. 2. The next step of the processor 52 is to reduce
25 the pressure that is supplied to the actuator 78. As mentioned before, the actuator 78 has a bleed line which allows a small amount of fluid or gas to escape from its internal cylinder. This allows for a slow steady swing of the swing arm 46 so the swing arm will pivot about pivot portion 100 to a position shown in Fig. 4.

As the swing arm 46 is rotating slowly into the cleaning position of Fig. 4, the processor 52 takes an additional step of providing pressure to the disinfectant line 116 (shown in Fig. 2 only) that is in communication with the nozzle 47. The disinfectant line is in
5 communication with the disinfectant source (i.e. a storage tank which is not shown), that holds a supply of disinfectant which is generally iodine. When the disinfectant line is pressurized, disinfectant will be emitted from nozzle 47. Therefore as the swing arm 46 moves the horizontal member 90 in between the cow's hind legs the nozzle 47 is
10 spraying the disinfectant which covers the cow's udder from rear to front. When the swing arm 46 is in the position shown in Fig. 4, the actuator 78 is pressurized and the piston rod 120 will extend radially outwardly and begin to rotate swing arm 46 back to the position shown in Fig. 2. While the swing arm is being withdrawn from in between the
15 cow's hind legs, pressure to the disinfectant line is maintained and the nozzle 116 will spray a second coat of disinfectant on the cow's udder as the horizontal member 90 withdraws. When the swing arm 46 is near the position as shown in Fig. 2, the processor 52 cuts the pressure to the disinfectant line and the nozzle 47 ceases to emit
20 disinfectant. At this point the processor 52 is ready to receive a signal from the contact sensor 56 when the next stall is in the cleaning location.

The nozzle 47 could further emit a powder substance that is mixed in with compressed air so that when the compressed air flows
25 through the disinfectant line (not shown), the powder material will emit in a vertical direction on the cow's udder. Compressed air could also be used with a cleaning or disinfecting liquid such as iodine so that the dispersion pattern and concentrations of iodine are more desirable.

Although two sensors are employed in the present invention, the important aspect of the sensing system 50 is that it can detect the presence and location of a cow so that the extension arm's 90 path of travel will be guided through the cow's hind legs.

5 Fig. 5 discloses a second embodiment which is substantially similar to the first embodiment except instead of having pivot portion 100 in a position above the horizontal member 90, the pivot portion 117 is positioned onto a fixed a mounting structure 118. The arm 120 comprises a first portion 122 and an upper portion 124 (extension
10 arm). Located at the radially inward portion of upper portion 124 is a nozzle extension (fluid extension) 126 which is in communication with a pressure line which interns in communication with a supply of disinfectant. The actuator 128 operates a substantially similar manner as the actuator 78 in the first embodiment.

15 Fig. 6 shows a third embodiment where the apparatus of the present invention 150 comprises a control unit 152, an actuating member 154, and an extension arm 156. The control unit 152 comprises a processor, a sensing system, and a switch. The operation of the third embodiment is substantially similar to the previous
20 embodiments. The sensing system is designed to detect a certain amount of radial rotation of the rotating plate 22. Of course there are a number of ways of accomplishing this. For example, there could be an assortment of indicating marks which have a radial distance between them to correspond to the radial width of a stall. The sensing system
25 would detect the rotation of an indicating mark which would indicate a stall is in position for the cleaning process to occur. Further, a rotational sensing transducer could be employed to indicate a certain amount of rotation of the rotating plate 22 and this information could be transmitted to the processor of the control unit 152. It is advantageous

to use a cow detecting sensor in addition to a rotational sensor so to prevent the nozzle from disbursing disinfectant fluid into the air when a cow is not present in the stall

The actuating systems 154 could be accomplished by a variety
5 of methods such as but not limited to pneumatic cylinders, hydraulic cylinders, electromagnetic force, IC engine, etc. the important aspect of the actuating means is that it positions the dispersion portion 158 relatively quickly underneath the cow's udder and is withdrawn relatively quickly. Acceptable times to complete that operation would
10 be in the ranges of .2 seconds to 1.25 seconds.

The extension arm 156 has a dispersion portion 158 where a nozzle 160 is located. It is desirable to have the extension arm relatively thin in the tangential direction so as it can easily be positioned between the hind legs of the cow.

15 Fig. 7 shows a fourth embodiment where the apparatus of the present invention is positioned in the center portion in a circular herringbone parlor. The apparatus 200 is similar to the previous embodiments; however, the extension arm 202 travels substantially in a horizontal plane to have the dispersion section 204 to be in the fully
20 inserted cleaning position as shown by the hatched line of extension arm 202.

The cows 206 in Fig. 7 have an open portion 208 exposed that allows access for the extension arm to 202 to extend thereunder. By placing the base platform 209 in the center portion of the rotating plate
25 210, the apparatus 200 can take advantage of the open portion defined by hatched lines 212 and 214 to get access to the cleaning position which is located under the cows udder when the cow 206a is in the cleaning position as seen in Fig. 7.

As in the previous embodiments the apparatus 200 would have a rotational sensing system and actuator to position the arm 202.

Fig. 8 shows a fifth embodiment of the present invention where the apparatus's swing arm or cleaning section 220 pivots in the
5 substantial horizontal plane about point 222. As seen in Fig. 8, the swing arm 220 is in a retracted position as indicated by the solid lines. When the swing arm is in a cleaning position where the nozzle 224 is positioned substantially underneath the cow's udder.

Fig. 9 illustrates a sixth embodiment where the apparatus's
10 swing arm or cleaning section 230 pivots in the substantial horizontal plane about point 232. The swing arm 230 is in a retracted position as indicated by the solid line, and in a cleaning position as indicated by the broken line. When in a cleaning position the nozzle 230 for a positioned substantially underneath the udder of the cow.

15 The fifth and six embodiments of course have an actuating system to position the cleaning section in a cleaning position and in a retracted position. Further, a sensor is employed to detect the rotational position of the plate the cows are standing on.

The important aspects of the invention is the ability to position a
20 dispensing portion of an extension arm into a cleaning or dispersion position underneath the cow's udder so the dispensing portion can disburse fluid or powder thereon the cow's udder.

While the invention is susceptible of various modifications and alternative forms, specific embodiments thereof have been shown by
25 way of example in the drawings as herein described in detail. It should be understood, however, that it is not intended to limit the invention to the particular forms disclosed, but, on the contrary, the intention is to cover all modifications, equivalents and alternatives

[illegible]

I Claim:

1. A cleaning apparatus to clean an udder of a cow when the cow is at a cleaning location where the cleaning apparatus comprises:
 - 5 a mounting structure;
a cleaning section mounted to the mounting structure and having a cleaning fluid dispensing portion to dispense cleaning fluid against the cow's udder, and movable from a cleaning position to a retracted position;
 - 10 an actuating mechanism to move the cleaning section into its cleaning position to dispense cleaning fluid and back to the retracted position.
2. The cleaning apparatus of claim 1 further comprising:
 - 15 a sensing system that is adapted to detect if a cow is in the cleaning location.
3. The cleaning apparatus of claim 1 further comprising:
 - 20 a control system that can activate the actuator to move the cleaning section into a cleaning position and dispense cleaning fluid and further activate the actuator to move the cleaning section to the retracted position.
4. The cleaning apparatus of claim 2 further comprising:
 - 25 a control system that can activate the actuator to move the cleaning section into a cleaning position and dispense cleaning fluid and further activate the actuator to move the cleaning section to the retracted position.
5. The cleaning apparatus of claim 4 further comprising:

where the control system receives signals from the sensing system when the sensing system detects that a cow is in the cleaning position and the control system activates the actuator to move the cleaning section into a cleaning position and dispense cleaning fluid.

5

6. In a milking parlor having a plurality of milking stalls arranged to move through stations in a milking cycle when the stalls move through a milk extracting section where milking machines extract milk, through a post milking section and to an exit location, an udder cleaning apparatus positioned at a cleaning location intermediate the milk extracting location and the exit location, said cleaning apparatus comprising:

10

a mounting structure

a cleaning section having a cleaning fluid dispensing portion and being moveable between a cleaning position where the cleaning fluid dispensing portion is able to discharge cleaning fluid to clean the cow's udder and a retracted position;

15

an actuating mechanism to move the cleaning section into its cleaning position to dispense cleaning fluid and back to the retracted position.

20

7. The cleaning apparatus of claim 6 further comprising:

a sensing system that is adapted to detect if a cow is in the cleaning location.

- 25 8. The cleaning apparatus of claim 6 further comprising:

a control system that can activate the actuator to move the cleaning section into a cleaning position and dispense cleaning fluid and further activate the actuator to move the cleaning section to the retracted position.

- 5 9. The cleaning apparatus of claim 7 further comprising:

a control system that can activate the actuator to move the cleaning section into a cleaning position and dispense cleaning fluid and further activate the actuator to move the cleaning section to the retracted position.

- 10 10. The cleaning apparatus of claim 9 further comprising:

where the control system receives signals from the sensing system when the sensing system detects that a cow is in the cleaning position and the control system activates the actuator to move the cleaning section into a cleaning position and dispense cleaning fluid.

15

11. A cow udder cleaning apparatus for cleaning a cow at a cleaning location where the cow udder cleaning apparatus comprises:

a mounting structure,

a positioning system mounted on said mounting structure and comprising an extension arm and an actuator, said extension arm having a path of travel that is adapted to extend said extension arm underneath the udder of the cow in said cleaning location where the path of travel has a cleaning position and a retracted position,

20

a dispersion portion located on said extension arm, the dispersion portion is adapted to spray disinfectant in an upward direction on the cow's udder,

5 a sensor system that is adapted to detect if the cow is in the cleaning location,

a control unit comprising a timer and logic sequence where upon receiving a signal from the sensor system, will activate the said actuator which will bias said extension arm to extend in said path of travel to the cleaning position, said
10 control unit further having the functionality of activating said dispersion portion to spray disinfectant in an upward direction on the cow's udder.

12. The cow udder cleaning apparatus as recited in claim 11 whereas;

15 the path of travel is positioned between a front leg and a hind leg of the cow.

13. The cow udder cleaning apparatus as recited in claim 11 whereas;

the path of travel is positioned between the hind legs of the cow.

14. The cow udder cleaning apparatus as recited in claim 11 further
20 having;

the sensor system comprises a first sensor and a second sensor;

whereas the first sensor detects the position of a stall and the second sensor detects the presence of a cow in the stall.

25 15. The cow udder cleaning apparatus as recited in claim 11 further having:

the sensor system comprises an optical sensor that is adapted to detect the presence of a cow in the stall.

16. The cow udder cleaning apparatus has recited in claim 14 further having:

5 where the first sensor detects rotation of a platform where cows are standing thereon.

17. The cow udder cleaning apparatus has recited in claim 14 further having;

10 where the second sensor detects the presence of a cow in a stall when the cow is in the cleaning position.

18. The cow udder cleaning apparatus has recited in claim 16 further having;

 where the second sensor detects the presence of a cow in a stall when the cow is in the cleaning position.

15 19. A method of dispersing material on a cow's udder when the cow is in a operating location whereas;

20 a material dispersing apparatus is employed that comprises a mounting structure, an actuating mechanism and an extension arm, where the extension arm is mounted to the mounting structure and the actuating mechanism positions the extension arm in a dispersion position and a retracted position, the extension arm has a dispersion portion which is adapted to deliver material in an upward direction;

25 the actuating mechanism positions the extension arm to the dispersion position and material is dispersed from the


the actuating mechanism positions the extension arm to a retracted position;

5 whereas the mounting structure moves with respects to the
cow.

Abstract


A method apparatus for teat dipping for sanitizing the udder of a cow either before or after milking. The apparatus has an extension arm with a dispersion portion so that when a cow is in a cleaning location the extension arm will extend underneath a cow's udder and dispersed cleaning fluid onto the cow's udder. A sensing system is used that detects the rotation of the parlor to determine if a cow is at a cleaning location. Further, the sensing system detects whether a cow is present in a stall of the rotary milking parlor.

20

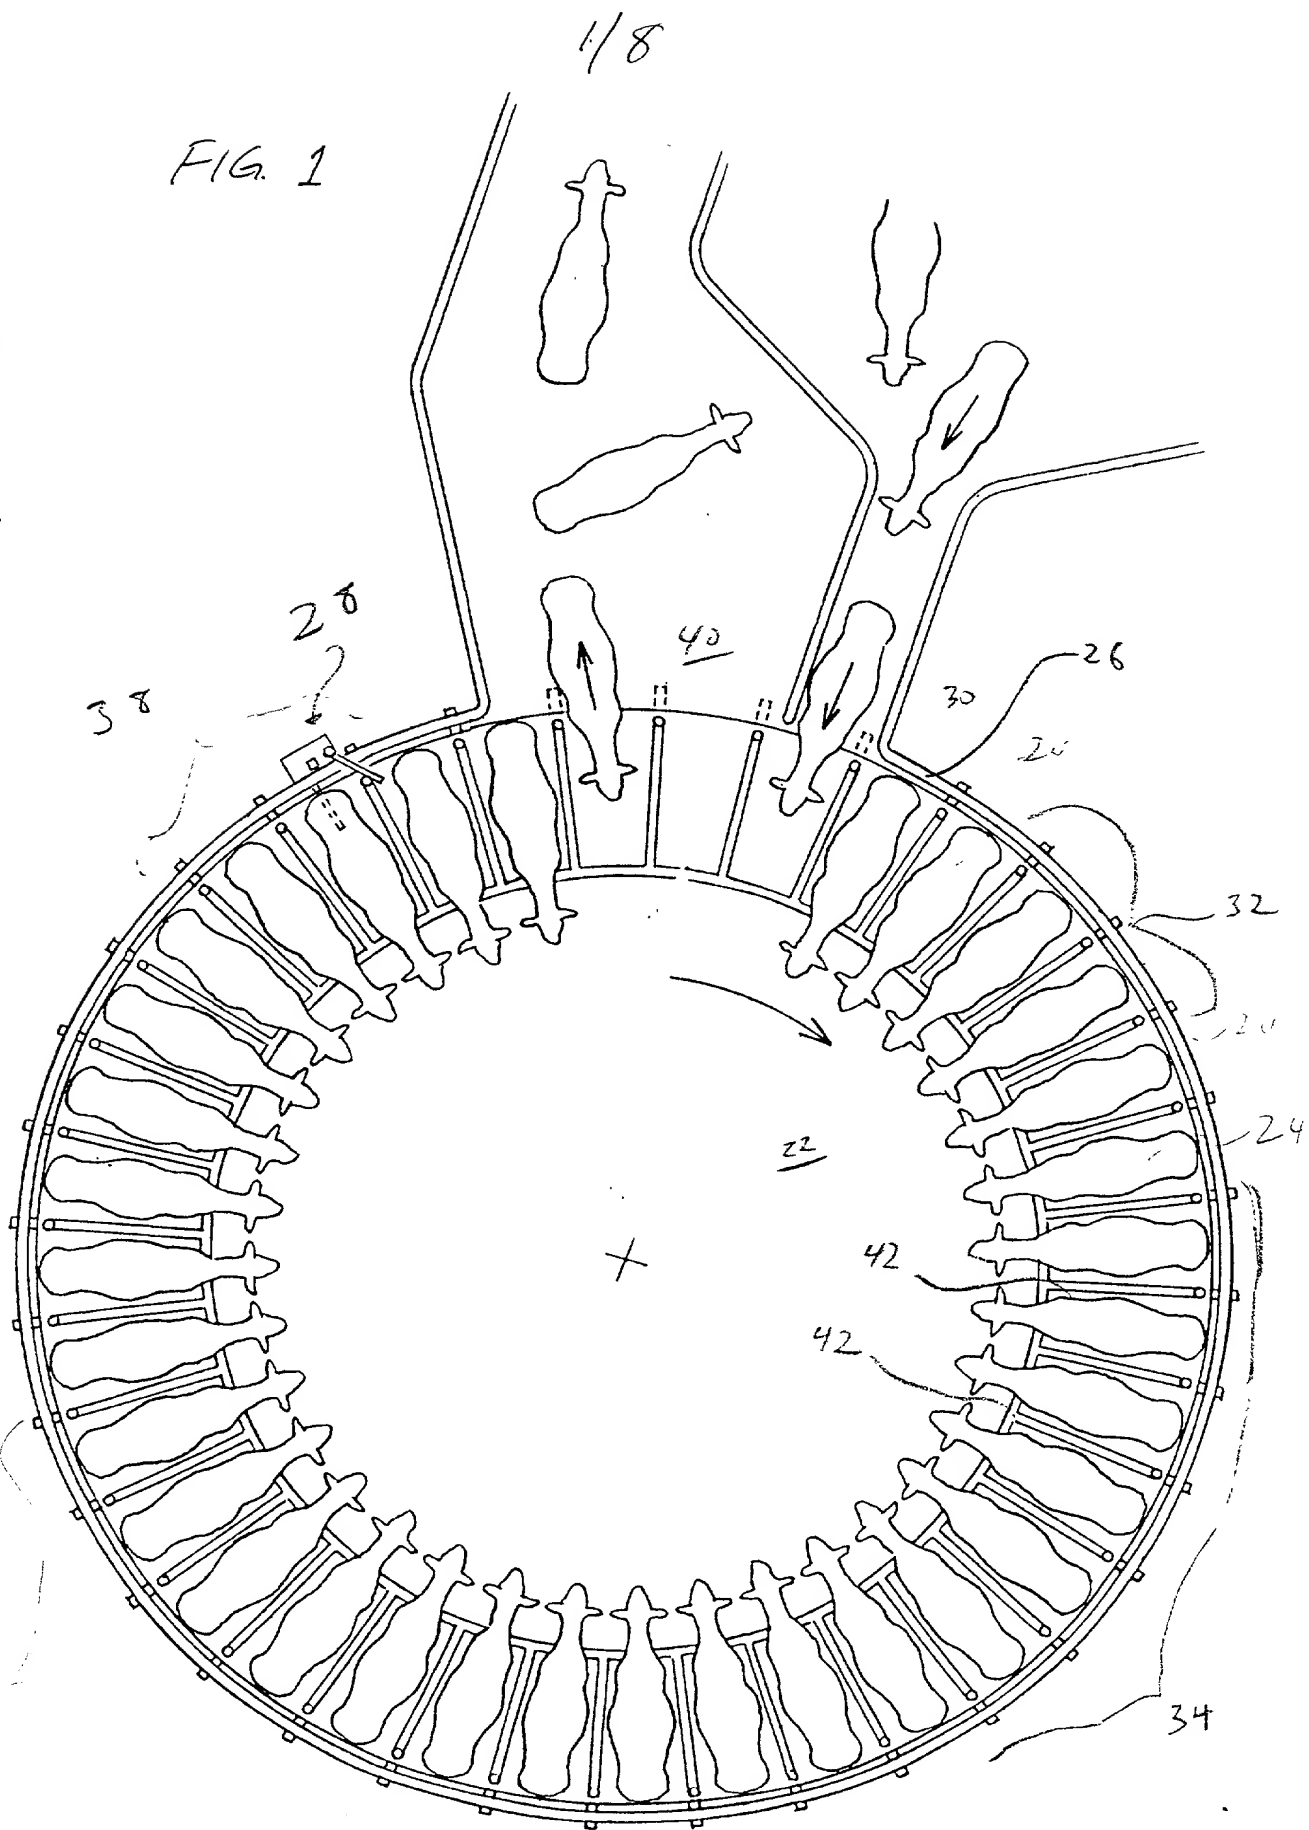


3/8

FIG. 3

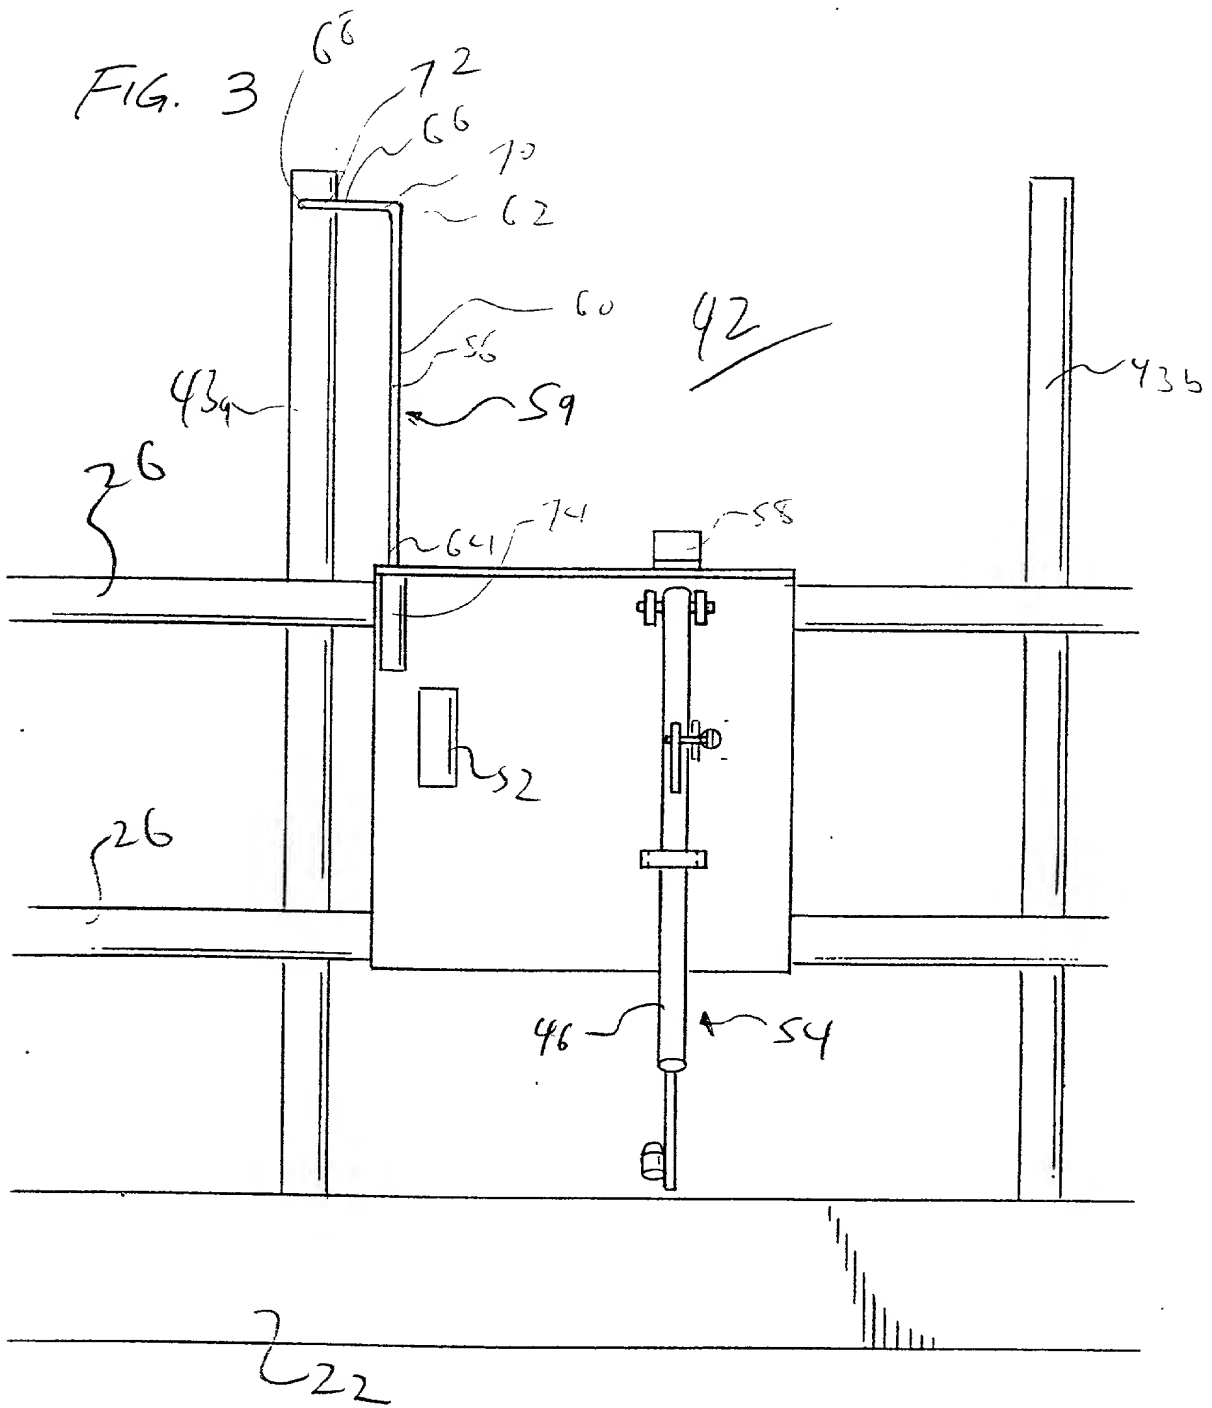


4/8

FIG. 4

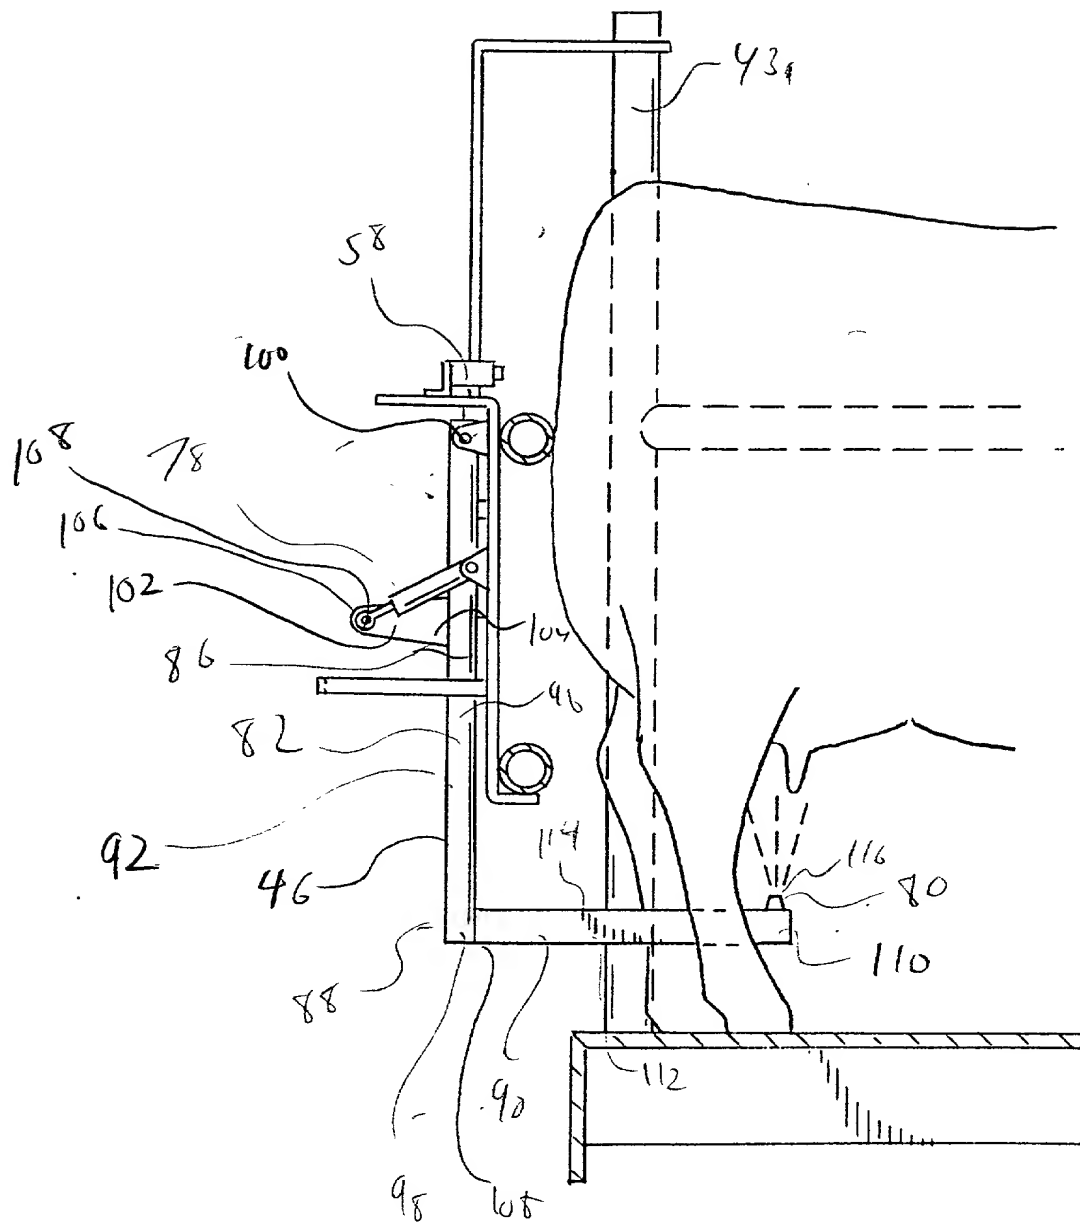

5/8

Fig 5

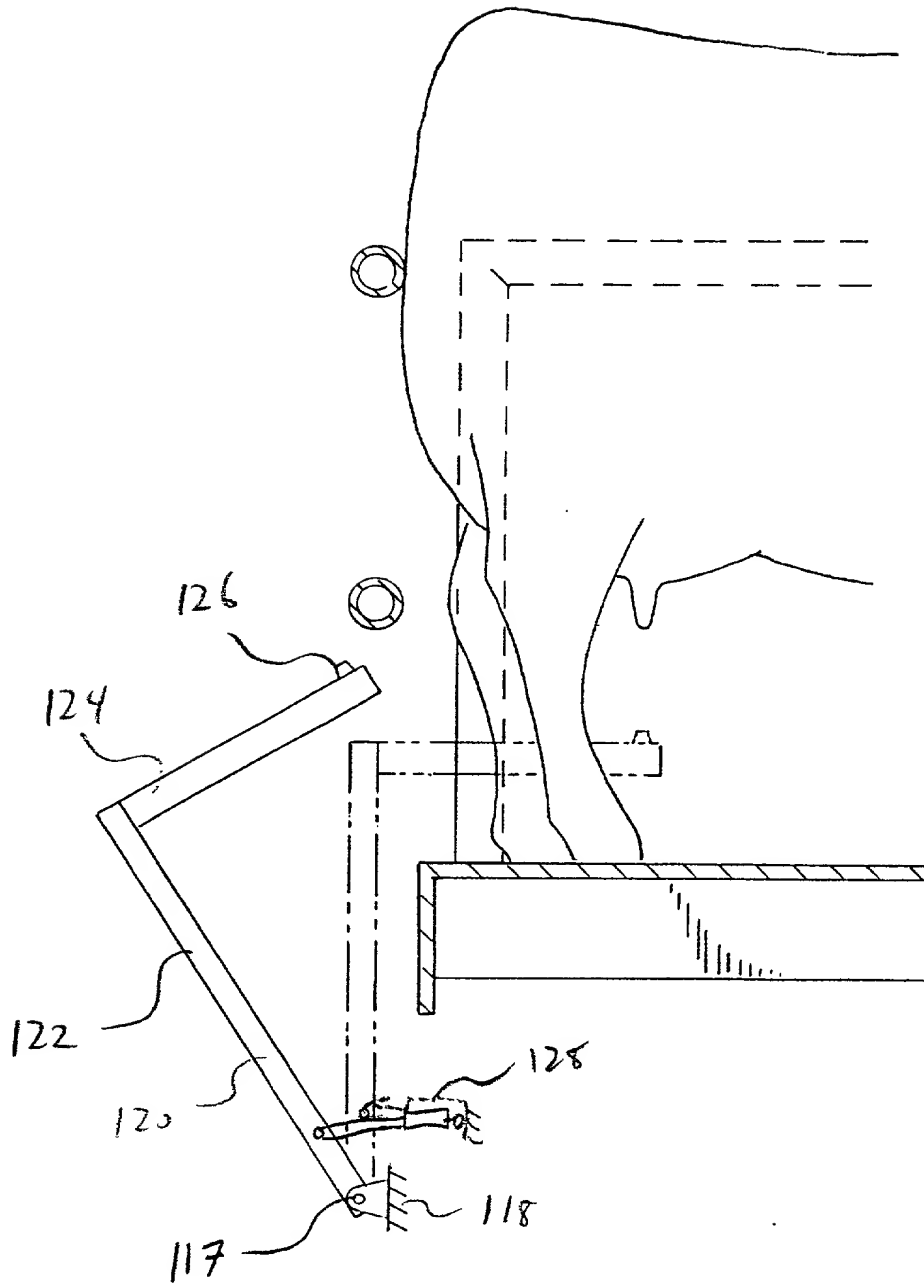

6/8

Fig 6


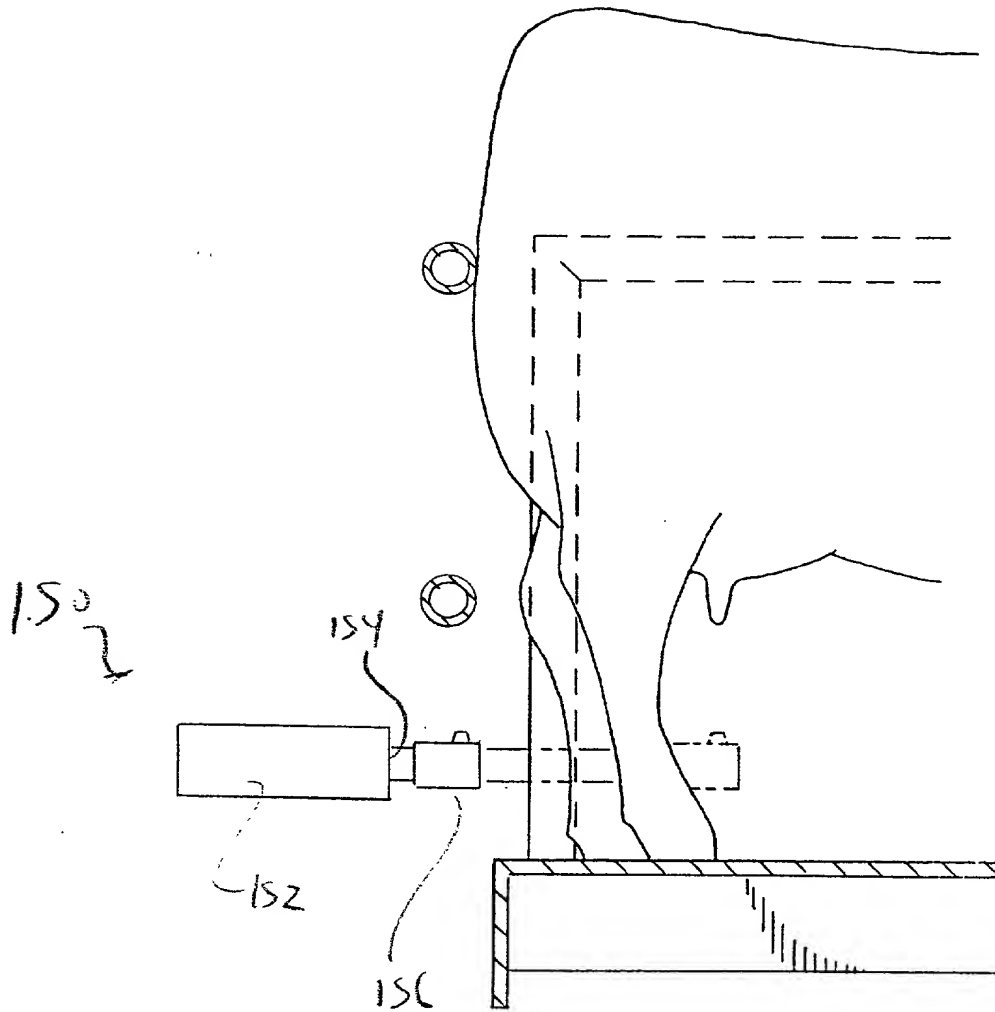


Fig 7

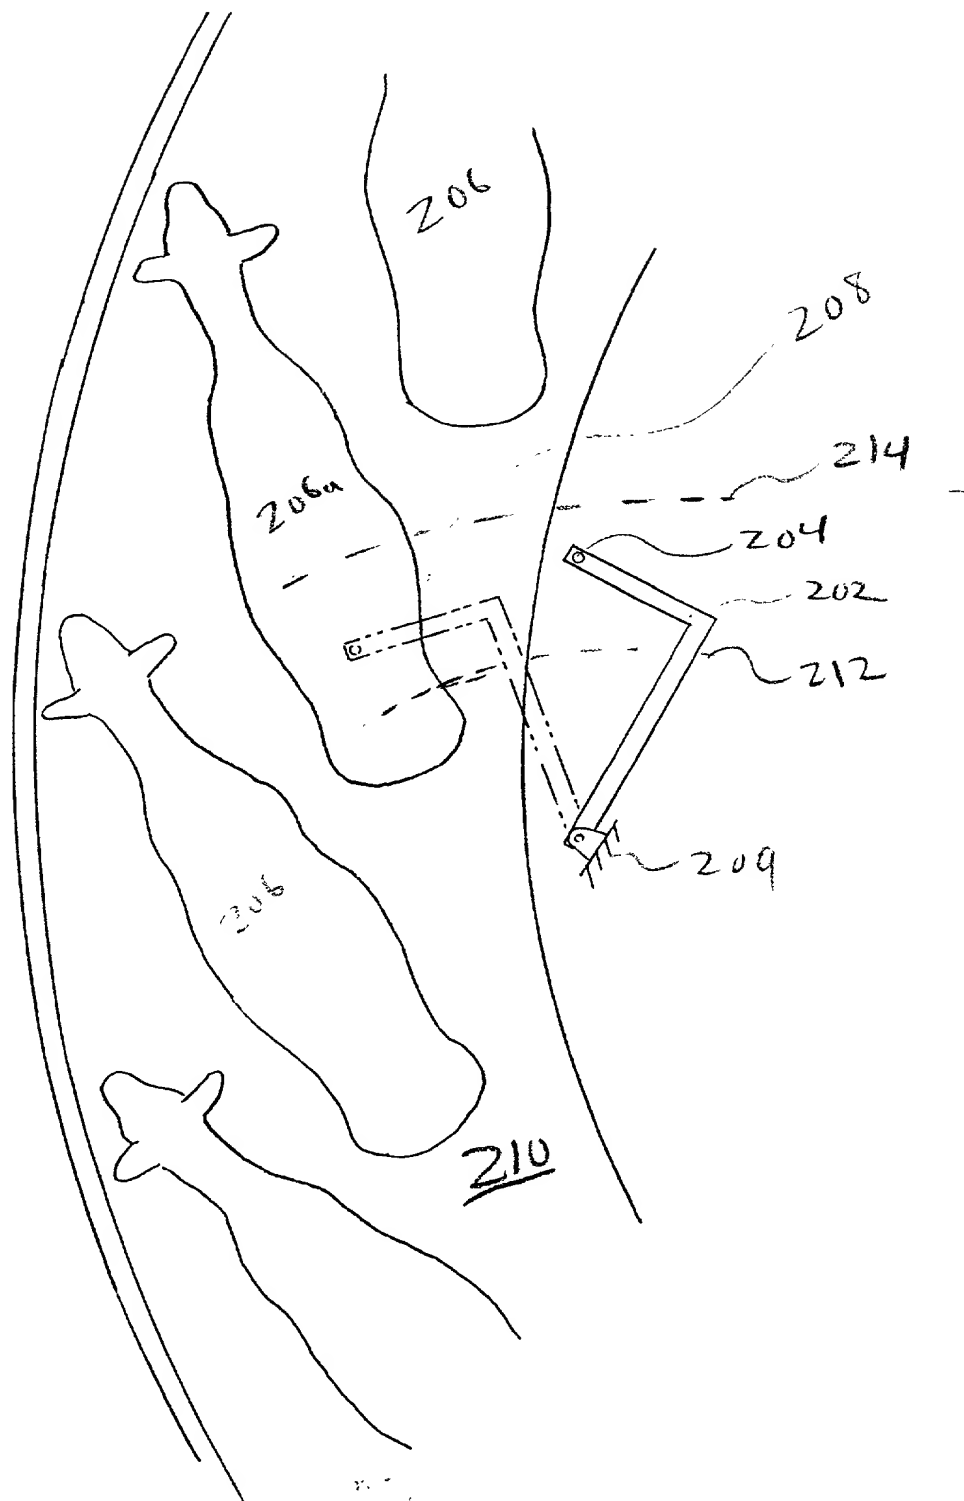

8/8

First


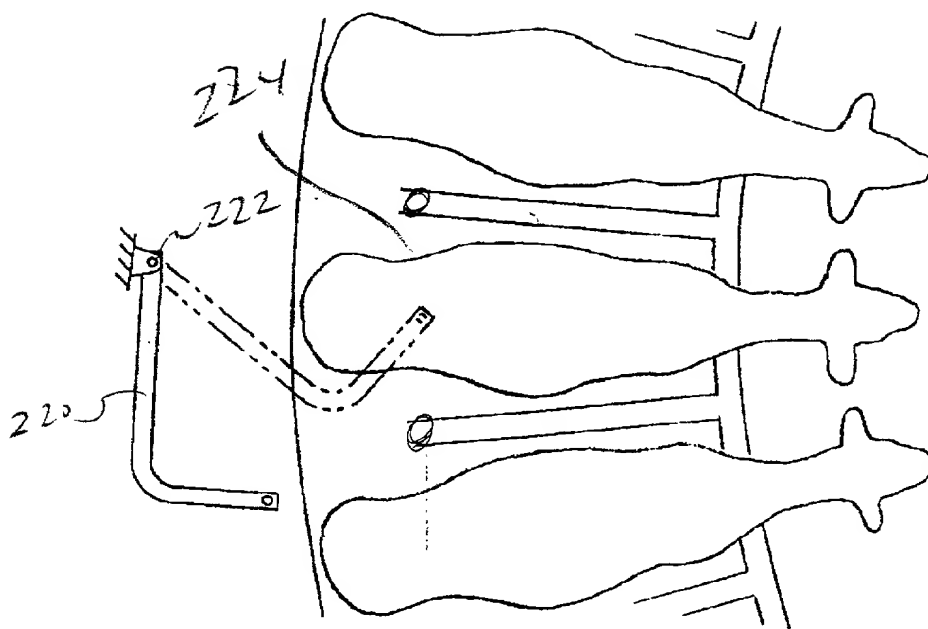


Fig 9

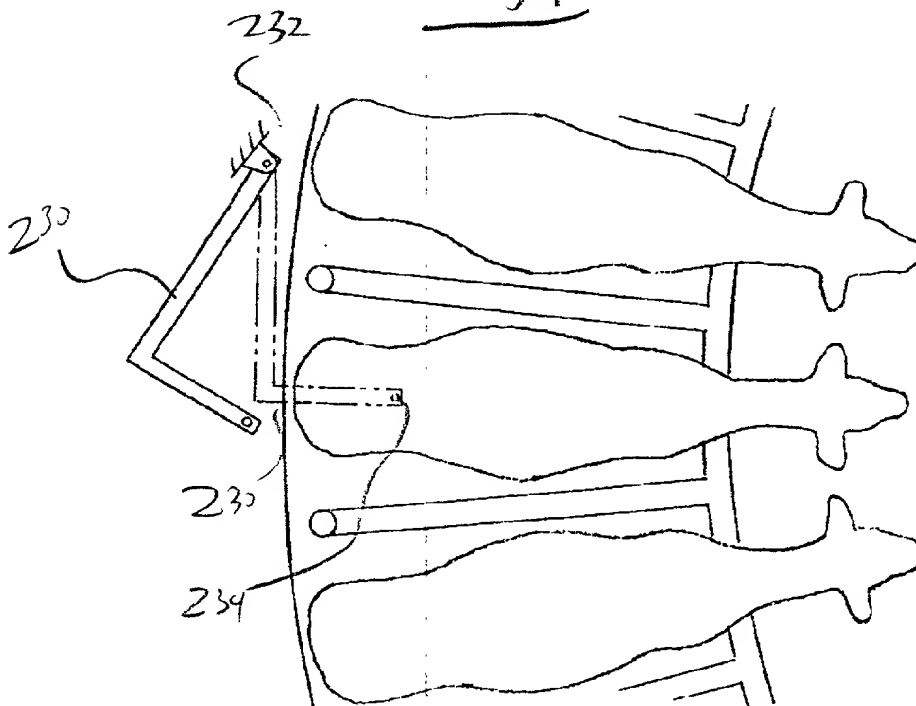

+

+

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket		P313347
	First Named Inventor		Dave DeWaard
	COMPLETE IF KNOWN		
	Application Number		
	Filing Date		October 25, 2000
<input type="checkbox"/> Declaration Submitted with Initial Filing OR <input checked="" type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 C.F.R. 1.16 (e)) required)	Group Art Unit		
	Examiner Name		

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.**

Please type a plus sign (+) inside this box



PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE


Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, 1 acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
---	--	---

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: ☒ Customer Number 22931 

Place Customer Number Bar Code Label here

☐ Registered practitioner(s) name/registration number listed below

Name	Registration Number	Name	Registration Number
Robert B. Hughes	19,304		
Michael R. Schacht	33,550		
Michael F. Hughes	41,084		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number 22931 OR ☐ Correspondence address below
or Bar Code Label

Name	Hughes & Schacht P.S.				
Address	2801 Meridian Street, Suite 1				
Address					
City	Bellingham	State	WA	ZIP	98225
Country	U.S.	Telephone	(360) 647-1296	Fax	(360) 671-2489

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle if any)	Family Name or Surname
Dave	DeWaard

Inventor's Signature					Date		
Residence: City	Lynden	State	WA	Country	U.S.	Citizenship	U.S.
Post Office Address	8540 Benson						
Post Office Address							
City	Lynden	State	WA	ZIP	98264	Country	U.S.

☐ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto